


### Retaining Rings for Shafts, Normal Type (external)

Seguros con exterior

Bagues d'arrêt pour arbres exécution normale

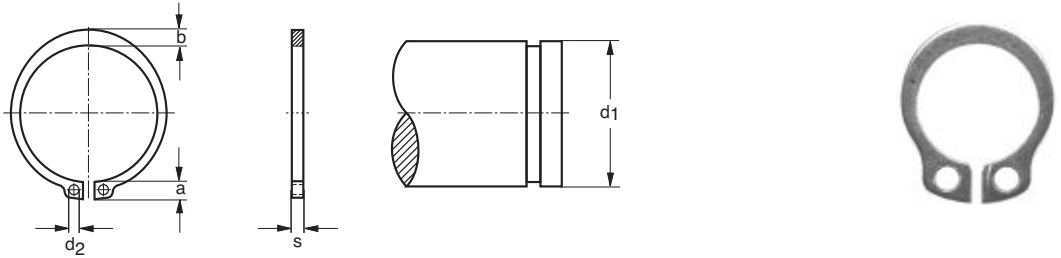

d1	5	6	7	8	9	10	11	12	13	14	15
a	2.5	2.7	3.1	3.2	3.3	3.3	3.3	3.3	3.4	3.5	3.6
b	1.1	1.3	1.4	1.5	1.7	1.8	1.8	1.8	2.0	2.1	2.2
d2	1.0	1.2	1.2	1.2	1.2	1.5	1.5	1.7	1.7	1.7	1.7
s	0.6	0.7	0.8	0.8	1.0	1.0	1.0	1.0	1.0	1.0	1.0
W	.066	.084	.121	.158	.300	.340	.410	.500	.530	.640	.670

d1	16	17	18	19	20	22	23	24	25	26	27
a	3.7	3.8	3.9	3.9	4.0	4.2	4.3	4.4	4.4	4.5	4.6
b	2.2	2.3	2.4	2.5	2.6	2.8	2.9	3.0	3.0	3.1	3.1
d2	1.7	1.7	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
s	1.0	1.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2	1.2
W	.700	.820	1.11	1.22	1.30	1.50	1.63	1.77	1.90	1.96	2.20

d1	28	30	32	34	35	36	38	39	40
a	4.7	5.0	5.2	5.4	5.6	5.6	5.8	5.9	6.0
b	3.2	3.5	3.6	3.8	3.9	4.0	4.2	4.3	4.4
d2	2.0	2.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5
s	1.5	1.5	1.5	1.5	1.5	1.75	1.75	1.75	1.75
W	2.92	3.31	3.24	3.8	4	5	5.62	5.8	6.03

(W ~ Weights of standard sizes in kilograms per 1000 pieces)