


**Retaining Rings for Bores, Normal Type (internal)**

Seguros de interior

Bagues d'arrêt pour alésages exécution normales

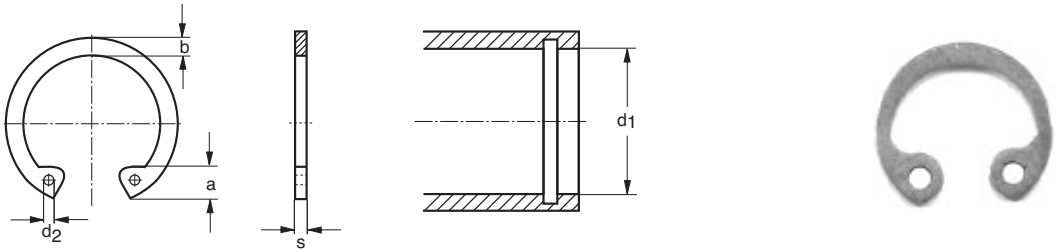

d1	8	9	10	11	12	13	14	15	16	17	18
a	2.5	2.5	3.2	3.3	3.4	3.6	3.7	3.7	3.8	3.9	4.1
b	1.1	1.3	1.4	1.5	1.7	1.8	1.8	2.0	2.0	2.1	2.2
d2	1.0	1.0	1.2	1.2	1.5	1.5	1.7	1.7	1.7	1.7	2.0
s	0.8	0.8	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0	1.0
W	.140	.150	.180	.310	.370	.420	.520	.560	.600	.650	.740

d1	19	20	21	22	23	24	25	26	27	28	29
a	4.1	4.1	4.2	4.2	4.2	4.3	4.5	4.7	4.7	4.8	4.8
b	2.2	2.3	2.4	2.5	2.5	2.6	2.7	2.8	2.9	2.9	3.0
d2	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0	2.0
s	1.0	1.0	1.0	1.0	1.2	1.2	1.2	1.2	1.2	1.2	1.2
W	.830	.900	1	1.1	1.33	1.42	1.5	1.6	1.7	1.8	-

d1	30	31	32	34	35	36	37	38	40
a	4.8	5.2	5.4	5.4	5.4	5.4	5.5	5.5	5.8
b	3.0	3.1	3.2	3.3	3.4	3.5	3.6	3.7	3.9
d2	2.0	2.5	2.5	2.5	2.5	2.5	2.5	2.5	2.5
s	1.2	1.2	1.2	1.5	1.5	1.5	1.5	1.5	1.75
W	2.06	2.1	2.21	3.2	3.54	3.7	3.74	3.9	4.7

(W ~ Weights of standard sizes in kilograms per 1000 pieces)