


Slotted Flat Head Tapping Screws

Pijas cabeza plana ranurada

Vis à tôle à tête fraisée avec fente

A2
A4

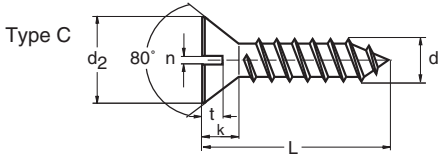

d	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
d (U.S. equiv)	#2	#4	#6	#7	#8	#10	#12	1/4
d2	4.3	5.5	6.8	7.5	8.1	9.5	10.8	12.4
k	1.3	1.7	2.1	2.3	2.5	3	3.4	3.8
n	0.6	0.8	1	1	1.2	1.2	1.6	1.6
t	0.4	0.5	0.6	0.7	0.75	0.85	1	1.2

d	L	W
2.2	6.5	.130
2.2	9.5	.200
2.2	13	.260
2.2	16	.340
2.2	19	.410
2.2	22	.480
2.2	25	.560
2.9	6.5	.242
2.9	9.5	.350
2.9	13	.465
2.9	16	.579
2.9	19	.694
2.9	22	.810
2.9	25	.922
3.5	6.5	.387
3.5	9.5	.541
3.5	13	.701
3.5	16	.871
3.5	19	1.02
3.5	22	1.17
3.5	25	1.32
3.5	32	1.67
3.5	38	1.97
3.9	9.5	.660
3.9	13	.880
3.9	16	1.07

d	L	W
3.9	19	1.26
3.9	22	1.45
3.9	25	1.64
3.9	32	2.08
3.9	38	2.46
3.9	45	2.90
3.9	50	3.20
3.9	60	3.80
4.2	9.5	.780
4.2	13	1.02
4.2	16	1.23
4.2	19	1.44
4.2	22	1.65
4.2	25	1.86
4.2	32	2.35
4.2	38	2.77
4.2	45	3.26
4.2	50	3.61
4.2	60	4.31
4.2	70	5.01
4.2	80	5.71
4.8	9.5	1.10
4.8	13	1.45
4.8	16	1.75
4.8	19	2.05
4.8	22	2.35

d	L	W
4.8	25	2.65
4.8	32	3.35
4.8	38	3.95
4.8	45	4.65
4.8	50	5.15
4.8	60	6.15
4.8	70	7.15
4.8	80	8.15
4.8	90	9.15
4.8	100	10.1
5.5	13	2.11
5.5	16	2.49
5.5	19	2.87
5.5	22	3.26
5.5	25	3.65
5.5	32	4.56
5.5	38	5.34
5.5	45	6.25
5.5	50	6.90
5.5	60	8.20
5.5	70	9.50
5.5	80	10.8
5.5	90	12.1
5.5	100	13.4
6.3	13	2.53
6.3	16	3.07

d	L	W
6.3	19	3.61
6.3	22	4.15
6.3	25	4.69
6.3	32	5.95
6.3	38	7.03
6.3	45	8.29
6.3	50	9.19
6.3	60	11.0
6.3	70	12.8
6.3	80	14.6
6.3	90	16.4
6.3	100	18.2

(W ~ Weights of standard sizes in kilograms per 1000 pieces)