


## Slotted Flat Head Machine Screws

Tornillos cabeza plana ranurado

Vis à tête fraisée avec fente

A2
A4

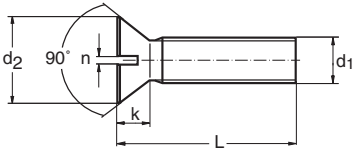

d <sub>1</sub>	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	M10	M12
d <sub>2</sub>	3	3.8	4.7	5.6	6.5	7.5	9.2	11	14.5	18	22
k max.	0.96	1.2	1.5	1.65	1.93	2.2	2.5	3	4	5	6
n	0.4	0.5	0.6	0.8	0.8	1	1.2	1.6	2	2.5	3
pitch	0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5	1.75

d	L	W
M1.6	4	.069
M1.6	5	.081
M1.6	6	.093
M1.6	8	.116
M1.6	10	.139
M2	4	.119
M2	5	.137
M2	6	.152
M2	8	.193
M2	10	.231
M2	12	.268
M2	16	.343
M2	20	.418
M2	25	.512
M2.5	4	.206
M2.5	5	.236
M2.5	6	.266
M2.5	8	.326
M2.5	10	.386
M2.5	12	.446
M2.5	16	.567
M2.5	20	.687
M2.5	25	.838
M3	4	.291
M3	5	.335
M3	6	.379
M3	8	.467

d	L	W
M3	10	.555
M3	12	.643
M3	14	.731
M3	16	.820
M3	18	.908
M3	20	.996
M3	22	1.08
M3	25	1.22
M3	30	1.44
M3	35	1.66
M3	40	1.88
M3	45	2.10
M3	50	2.32
M3.5	6	.554
M3.5	8	.673
M3.5	10	.792
M3.5	12	.911
M3.5	16	1.15
M3.5	20	1.39
M4	5	.676
M4	6	.754
M4	8	.910
M4	10	1.06
M4	12	1.22
M4	14	1.37
M4	16	1.53
M4	18	1.68

d	L	W
M4	20	1.84
M4	22	1.99
M4	25	2.22
M4	30	2.61
M4	35	2.99
M4	40	3.36
M4	45	3.73
M4	50	4.10
M4	55	4.47
M4	60	4.84
M5	6	1.21
M5	8	1.45
M5	10	1.70
M5	12	1.95
M5	14	2.19
M5	16	2.44
M5	18	2.69
M5	20	2.94
M5	22	3.18
M5	25	3.55
M5	30	4.16
M5	35	4.65
M5	40	5.39
M5	45	6.02
M5	50	6.65
M5	55	7.28
M5	60	7.91

d	L	W
M5	70	9.17
M5	80	10.4
M5	90	11.7
M5	100	12.9
M6	8	2.19
M6	10	2.54
M6	12	2.89
M6	14	3.25
M6	16	3.61
M6	18	3.95
M6	20	4.31
M6	22	4.66
M6	25	5.19
M6	30	6.08
M6	35	6.96
M6	40	7.84
M6	45	8.73
M6	50	9.61
M6	55	10.5
M6	60	11.4
M6	70	13.1
M6	80	14.9
M6	90	16.7
M6	100	18.4
M8	10	5.03
M8	12	5.67
M8	14	6.30

d	L	W
M 8	16	6.94
M 8	18	7.57
M 8	20	8.21
M 8	25	9.79
M 8	30	11.4
M 8	35	13.0
M 8	40	14.6
M 8	45	16.2
M 8	50	17.8
M 8	55	19.4
M 8	60	21.0
M 8	70	24.2
M 8	80	27.4
M 8	90	30.6
M 8	100	33.8
M10	16	11.6
M10	20	13.6
M10	25	16.1
M10	30	18.6
M10	35	21.1
M10	40	23.6
M10	45	26.1
M10	50	28.6
M10	55	31.1
M10	60	33.7
M10	70	38.8
M10	80	43.9



(W ~ Weights of standard sizes in kilograms per 1000 pieces)

**Slotted Flat Head Machine Screws**

Tornillos cabeza plana ranurado

Vis à tête fraisée avec fente

A2
A4

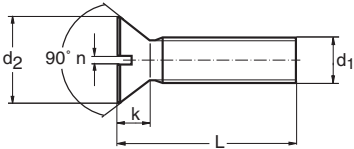

d <sub>1</sub>	M1.6	M2	M2.5	M3	M3.5	M4	M5	M6	M8	M10	M12
d <sub>2</sub>	3	3.8	4.7	5.6	6.5	7.5	9.2	11	14.5	18	22
k max.	0.96	1.2	1.5	1.65	1.93	2.2	2.5	3	4	5	6
n	0.4	0.5	0.6	0.8	0.8	1	1.2	1.6	2	2.5	3
pitch	0.35	0.4	0.45	0.5	0.6	0.7	0.8	1	1.25	1.5	1.75

d	L	W
M10	90	49.0
M10	100	54.1
M12	20	20.8
M12	25	24.4
M12	30	28.1
M12	35	31.7
M12	40	35.3
M12	45	39.0
M12	50	42.6
M12	55	46.2
M12	60	49.8
M12	70	57.1
M12	80	64.4
M12	90	71.1
M12	100	78.4

(W ~ Weights of standard sizes in kilograms per 1000 pieces)