


Slotted Oval Head Tapping Screws

Pijas cabeza oval

Vis à tôle à tête fraisée bombée avec fente

A2
A4

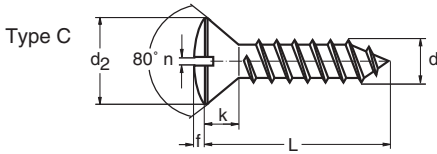

d	2.2	2.9	3.5	3.9	4.2	4.8	5.5	6.3
d (U.S. equiv)	#2	#4	#6	#7	#8	#10	#12	1/4
d ₂	4.3	5.5	6.8	7.5	8.1	9.5	10.8	12.4
f	0.7	0.9	1.2	1.3	1.4	1.5	1.7	2
k	1.3	1.7	2.1	2.3	2.5	3	3.4	3.8
n	0.6	0.8	1	1	1.2	1.2	1.6	1.6

d	L	W
2.2	6.5	.180
2.2	9.5	.240
2.2	13	.310
2.2	16	.370
2.2	19	.430
2.2	22	.490
2.2	25	.550
2.9	6.5	.332
2.9	9.5	.440
2.9	13	.566
2.9	16	.674
2.9	19	.782
2.9	22	.890
2.9	25	1.00
3.5	9.5	.720
3.5	13	.900
3.5	16	1.05
3.5	19	1.20
3.5	22	1.35
3.5	25	1.50
3.5	32	1.85
3.5	38	2.15
3.9	9.5	.890
3.9	13	1.11
3.9	16	1.30
3.9	19	1.49

d	L	W
3.9	22	1.68
3.9	25	1.87
3.9	32	2.31
3.9	38	2.75
3.9	45	3.19
3.9	50	3.50
3.9	60	4.13
4.2	9.5	1.07
4.2	13	1.32
4.2	16	1.53
4.2	19	1.74
4.2	22	1.95
4.2	25	2.16
4.2	32	2.65
4.2	38	3.08
4.2	45	3.57
4.2	50	3.92
4.2	60	4.62
4.2	70	5.32
4.2	80	6.02
4.8	9.5	1.88
4.8	13	2.18
4.8	16	2.48
4.8	19	2.78
4.8	22	3.08
4.8	25	3.78

d	L	W
4.8	32	4.38
4.8	38	5.08
4.8	45	5.90
4.8	50	6.48
4.8	60	7.65
4.8	70	8.81
4.8	80	9.98
4.8	90	11.1
4.8	100	12.3
5.5	13	3.12
5.5	16	3.50
5.5	19	3.89
5.5	22	4.28
5.5	25	5.19
5.5	32	5.97
5.5	38	6.88
5.5	45	7.94
5.5	50	8.70
5.5	60	10.2
5.5	70	11.7
5.5	80	13.2
5.5	90	14.8
5.5	100	16.3
6.3	13	4.00
6.3	16	4.54
6.3	19	5.08

d	L	W
6.3	22	5.62
6.3	25	6.88
6.3	32	7.96
6.3	38	9.24
6.3	45	10.3
6.3	50	11.1
6.3	60	12.6
6.3	70	14.2
6.3	80	15.7
6.3	90	17.3
6.3	100	18.8

(W ~ Weights of standard sizes in kilograms per 1000 pieces)